


SERIES DT



CHARACTERISTICS

- Low Cost
- UL high Temp. Material
- Single Code DIP
- Breakable Shunts
- Easy to program


SPECIFICATIONS

Rating: 10 mA max @ 5VDC max
Contact Resistance: 100 mΩ max initial
Insulation Resistance: 100 MΩ min @ 100V
Temperature: Operating -10°C to +70°C
Operating Life: 100.000 operations
Operating Force: Down&up 40 gf ±20 gf
 Push 150 gf ±50 gf
Soldering specifications: **Manual** 320°C for max 2 sec, **Reflow** max 240°C

PACKAGING


Type of Packaging: Tube or Tape & Reel

HOW TO ORDER

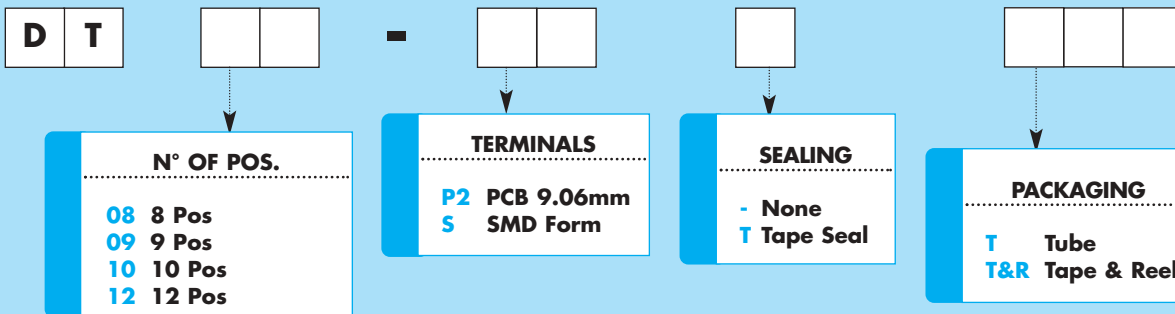


DIMENSIONS

SMD Type (S)

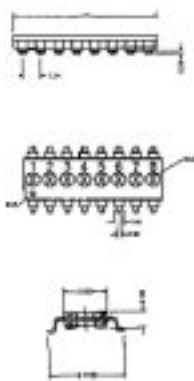


Part N°: DT08-Sxx
Define x Options

PCB Type (P2)

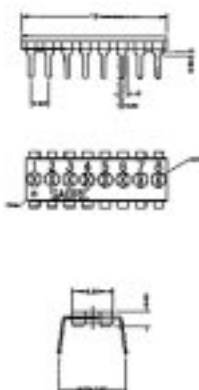


Part N°: DT08-P2xx
Define x Options

P.C.B. Layout SMD



P.C.B. Layout T/H



Dimensions & Packaging

Positions	8	9	10	12
A in mm	22.32	22.86	25.40	30.48

Notes:

- To programme the code: break the contact with any pointed object
- All models can be supplied **programmed** or **unprogrammed**